





HOTSOAK 72

AQUATIC


HOTSOAK SERIES MODEL # AI12AIR7240HS

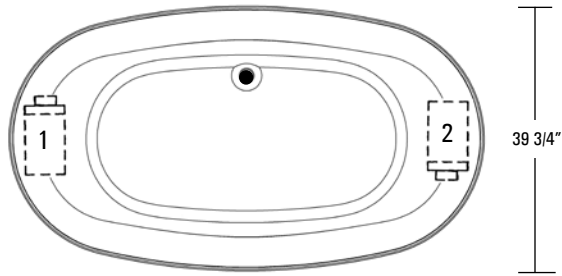

Two Person Bath

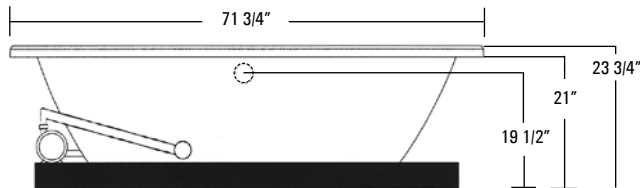

Rough-In Plumbing Measurements



SPECIFICATIONS:

GENERAL SPECIFICATIONS:

| | |
|---------------------|-----------------------------|
| Tub Size | 71 3/4" x 39 3/4" x 23 3/4" |
| | 182 cm x 101 cm x 60 cm |
| Bathing Well | 43" long |
| | 22 1/2" wide |
| | 21" interior depth |
| Shipping Weight | 195 lbs. / 88 kg |
| Tub Weight Filled | 742 lbs. / 337 kg |
| Tub Only Weight | 134 lbs. / 61 kg |
| Gallons to Overflow | 76 gal. / 288 L |

ELECTRICAL SPECIFICATIONS:

| | |
|--------------|---|
| Pump | 1/15 HP; 1.3 AMP; 110V |
| Heater | 1.5 kW; 12.5 AMP; 110V |
| Requirements | 20 AMP; 110V, separate circuit required protected w/ Class A GFCI |

STANDARD EQUIPMENT:

Aquatic Quality Features:

- 1.5 kW Inline Maintenance Heater
- Run-Dry Pump with 20-Minute Timer
- 2 Circulation Portal Covers
- Bath-Side On/Off Electronic Button
- "Quiet Pad" Anti-Vibration Pump Mount for Quiet Operation
- Slip Resistant Floor
- Extra Deep and Long Bathing Well
- Pre-leveled ABS Support Base
- Heat-bent Rigid PVC Piping for Optimum Sanitary Conditions
- Durable, Easy to Clean, Lucite® Cast Acrylic Surface
- Available in 8 Standard No-Charge Colors

**UL & IAPMO Listed, Factory Tested
Limited Lifetime Warranty**

OPTIONAL EQUIPMENT:

- Chromatherapy LED Lighting*
- Comfort Pillow - Oval or Rectangle
- Lift & Turn Waste and Overflow
 - Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel or Oil Rubbed Bronze
- Cable Drive Waste and Overflow
 - Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel, Oil Rubbed Bronze or Color Matched (Bone, White and Biscuit Only)
- Optional Pump Location
- Premium Colors

All acrylic colors featured by Aquatic match the industry's leading fixture manufacturers.

**This whirlpool will need to be hard wired to the breaker box. Three outlets will be supplied on the whirlpool.*