



Note: The interior of bathing well and outside of bathing well can each be specified in a different color. Only one premium color upcharge will be applied if one or more premium colors are used.

Note: This model requires a remote blower location. The connection for the air blower is under the tub; the blower may be placed up to 15 feet away and connected by piping under the floor. Please refer to the Owner's Manual for detailed installation instructions. Document #1184 on our Fax-on Demand System or on our website at www.aquaticwhirlpools.com.

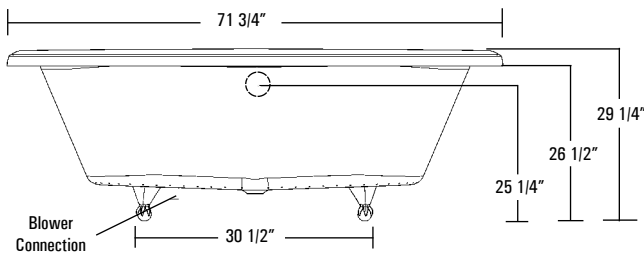

Rough-In Plumbing Measurements



SPECIFICATIONS:

GENERAL SPECIFICATIONS:

Tub Size	71 3/4" x 39 5/8" x 29 1/4"
	182 cm x 101 cm x 74 cm
Bathing Well	43" long
	22 1/2" wide
	21" interior depth
Maximum Water Depth	16 1/2"
Shipping Weight	517 lbs. / 234 kg
Tub Weight Filled	798 lbs. / 363 kg
Tub Only Weight	194 lbs. / 88 kg
Gallons to Overflow	76 gal. / 288 L

ELECTRICAL SPECIFICATIONS:

Blower/Heater Requirement	1 HP; 10.5 AMP; 120V 15 AMP; 120V, separate circuit required protected w/ Class A GFCI
---------------------------	--

STANDARD EQUIPMENT:

- Air Bath System:**
- 60 Air Jets
 - 1 HP Variable Speed, Remote Air Blower with 20-Minute Timer
 - 600 Watt Air Heating System
 - Electronic Control Package with Wave and Pulse Features
 - Automatic Purge and Dry Cycle
 - Waterproof Remote Control with infrared sensor and 25' cord
- Aquatic Quality Features:**
- Claw Feet Available in Chrome, Polished Brass, Satin Nickel, Polished Nickel, Oil Rubbed Bronze and White
 - Air Channels Lined with Antimicrobial Coating
 - Extra Deep Bathing Well
 - Durable, Easy to Clean, Lucite® Cast Acrylic Surface
 - Available in 8 Standard No-Charge Colors
- UL & IAPMO Listed, Factory Tested Limited Lifetime Warranty**

OPTIONAL EQUIPMENT:

- Comfort Pillow - Oval or Rectangle
- Waste and Overflow for Freestanding Models
 - Chrome, Polished Brass, Satin Nickel, Polished Nickel, Oil Rubbed Bronze or White
- Premium Colors

All acrylic colors featured by Aquatic match the industry's leading fixture manufacturers.

Each Serenity Air Bath model is equipped with a 600 watt air heating system to raise the temperature of the air going into the bath. This air temperature will be less than the bathing temperature of the water, but will help to reduce a rapid decrease in water temperature. In addition, the air coming from the air jets will feel cool against the skin, just as a breeze on a warm day cools your body. This system does not heat the water.

The manufacturer accepts a 1/4" variance. There are variations on each tub and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building should be measured from the tub; Aquatic Industries, Inc. assumes no responsibility for preparatory work. www.whirlpoolbath.net 800-894-1022