HOTSOAK 58

HOTSOAK SERIES MODEL # AI7242RUOHS

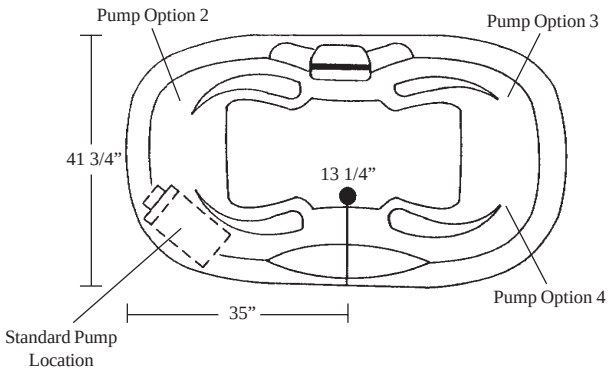

Two Person Bath

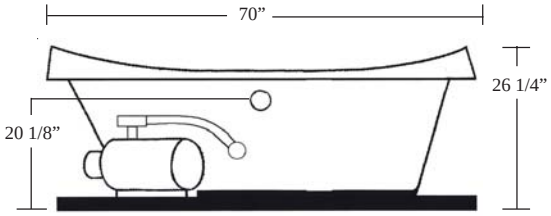



Rough-In Plumbing Measurements



SPECIFICATIONS:

General Specifications:

Tub Size	70” x 41 3/4” x 26 1/4”
	178 cm x 106 cm x 67 cm
Bathing Well	42 1/2” long
	23” wide
	23 1/4” interior depth
Shipping Weight	219 lbs. / 99 kg
Tub Weight Filled	919 lbs. / 417 kg
Tub Only Weight	134 lbs. / 61 kg
Gallons to Overflow	95 gal. / 360 L

Electrical Specifications:

Pump	1/15 HP; 1.3 AMP; 110V
Heater	1.5 kW; 12.5 AMP; 110V
Requirements	20 AMP; 110V, separate circuit required protected w/ Class A GFCI

STANDARD EQUIPMENT:

- **Aquatic Quality Features:**
  1.5 kW Inline Maintenance Heater
  Run-Dry Pump with 20-Minute Timer
  2 Circulation Portal Covers
  Bath-Side On/Off Electronic Button
  "Quiet Pad" Anti-Vibration Pump Mount for Quiet Pump Operation
  Extra Deep Bathing Well
  Acrylic Grab Bar
  4 Arm Rests
  Slip Resistant Floor
  Pre-leveled ABS Support Base
  Heat-bent Rigid PVC Piping for Optimum Sanitary Conditions
  Durable, Easy to Clean, Lucite® Cast Acrylic Surface
  Available in 8 Standard No-Charge Colors
- **UL & IAPMO Listed, Factory Tested**
- **Lifetime Limited Warranty**

OPTIONAL EQUIPMENT:

- Comfort Pillow -- Oval or Rectangle
- Grab Bar/Finish
  -- White, Biscuit, Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel or Oil Rubbed Bronze
- Lift & Turn Waste and Overflow
  -- Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel or Oil Rubbed Bronze
- Cable Drive Waste and Overflow
  -- Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel, Oil Rubbed Bronze or Color Matched (Bone, White & Biscuit Only)
- Decorative Rim Kit -- Chrome or Polished Brass
- Optional Pump Location
- Premium Colors

All acrylic colors featured by Aquatic match the industry's leading fixture manufacturers.

Fax-On-Demand Document #1233

TOLL-FREE, 24-HOUR 1-877-618-7024 FAX INFO

The manufacturer accepts a 1/4” variance. There are variations on each tub and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building should be measured from the tub; Aquatic Industries, Inc. assumes no responsibility for preparatory work.