

# POMPANO – ESTATE SERIES

inches (mm)

71 5/8 x 42 x 23 (1820 x 1070 x 585) • Fax on Demand #1304

WHIRLPOOL MODEL #AI72420

SOAKER MODEL #AI72420TO



## FEATURES

- 7 hydrotherapy jets: pressure-flo (4), StressEaz neck and shoulder therapy (1), recessed rotary (2)
- 1.75hp pump
- Electronic on/off control
- Deep bathing well
- Acrylic grab bars
- Sculpted armrests
- Slip-resistant floor
- Pre-leveled ABS support base
- Quiet pad anti-vibration pump mount
- Universal drain
- Lucite cast acrylic surface
- Limited lifetime warranty

## OPTIONS

- Chromatherapy LED lighting
- 1.5kW inline maintenance heater
- Comfort pillow: Biscuit, Black, White
- Grab bar(s): Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, Color matched (Biscuit, White, Clear)
- Cable drive waste & overflow: Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, Color Matched (Biscuit, Bone, White)
- Optional pump location
- Acrylic skirt: Color Matched

## AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand

## COLOR & TRIM OPTIONS

Stock	Premium
Almond (C, M)	Black (C, M)
Bone (C, M)	Cashmere (M)
Linen/Biscuit (C, M)	Mexican Sand (M)
Sterling Silver (C, M)	Red (M)
White (C, M)	Sandbar (M)




C = Color Matched Trim

M = Metallic Trim (Brushed Nickel, Chrome, Polished Brass)



# POMPANO

71 5/8 x 42 x 23 (1820 x 1070 x 585)  
inches (mm)

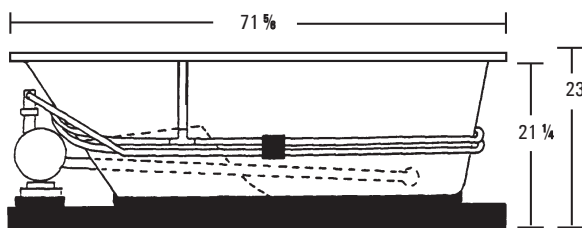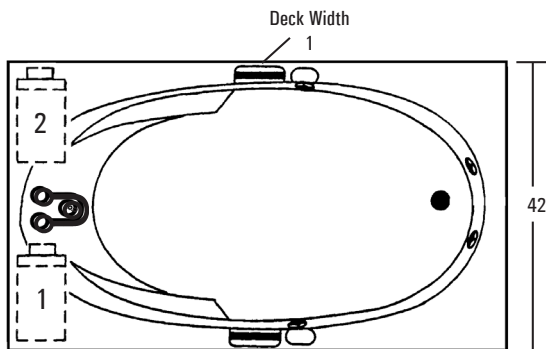

**Note: Tub Only units do not come standard with the Pre-leveled ABS Support Base.**

**FEATURES** lbs (kg) Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Jets	Pump	Heater	Controls	Drain	Pkg. Wt.
Soaker #AI7242OTO	Acrylic	0	-	-	-	Universal	182 (83)
Whirlpool #AI7242O	Acrylic	7	1.75 HP	1.5 kW Inline (optional)	Electronic on/off	Universal	232 (105)

## DIMENSIONS inches (mm)


Width Overall / Net	Depth Overall / Net	Height Overall / Net	Skirt Height
71 5/8 (1820)	42 (1070)	23 (585)	-

## SUMP DATA inches (mm)

Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
87 (2210)	68 (257)	67 3/4 (1720)	49 1/2 (1255)	30 1/4 (770)	27 (685)

## PLUMBING DIMENSIONS inches (mm)

A	B
2 1/2 (65)	10 3/8 (265)



## ELECTRICAL DATA

Component	Specification	Requirement
Pump	1.75 HP; 12 AMP; 110 V	15 AMP; 110V, separate circuit; Class A GFCI
Optional Heater	1.5 kW; 12.5 AMP; 110 V	15 AMP; 110V, separate circuit; Class A GFCI

**NOTES:**

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 20 (405 x 510) minimum access required at pump/blower location(s).